


akurit UPR

Transition profile

transition from plaster surfaces to surfaces with ceramic application

- visually accentuated and technically functional with drip edge
- material: stainless steel, RAL colours on request
- Delivery UPR in stainless steel only in whole packaging units

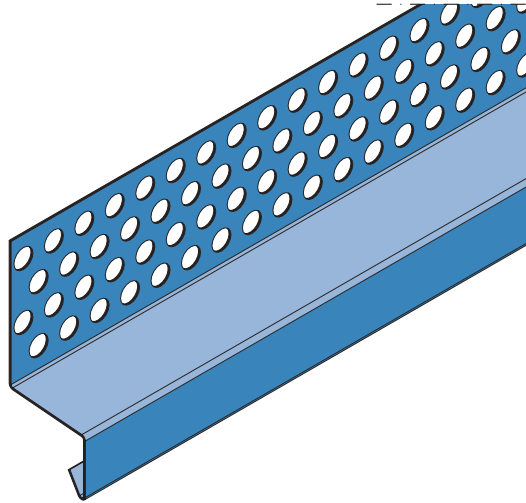

Applications

- for technically sound isolation between plaster and clinker facade

Processing

Applying / Processing / Assembling

- Glue the end profile with the adhesive and reinforcement mortar flush on the insulating material before the reinforcement layer is applied.
- The finish to the plaster system is to be made with a profile suitable for the purpose.
- The joint area between the plaster end profile and AKURIT UPR transition profile is to be sealed with a joint sealing tape.

Storage

- Store dry and as per instructions.

General notes

This information sheet provides only general recommendations. Should you have any queries relating to a specific application, please contact our technical sales advisor or call our hotline: +49 541 601-601. All of the details given are based on our current knowledge and experience and on the assumption that the materials are professionally applied and used for their normal purpose. All of the details are non-binding and do not release users from their duty to undertake their own tests to ensure suitability for the intended application. Due to the effects of different weather, processing and construction site conditions, no guarantee can be given for the general validity of all details. We reserve the right to make changes as a result of further development of the product and applications engineering. The general rules for construction engineering, the valid standards and guidelines, and the technical working guidelines must be observed. The publication of this technical data sheet renders all previous editions of this data sheet void. Please obtain the latest information from our website.