


# akurit MILANO W32

## Mesh profile

### connection profile for flexible plaster connections

- absorbs movement through TPE loop
- self-adhesive Sk-PE foam tape
- driving rain-proof
- with safety lip

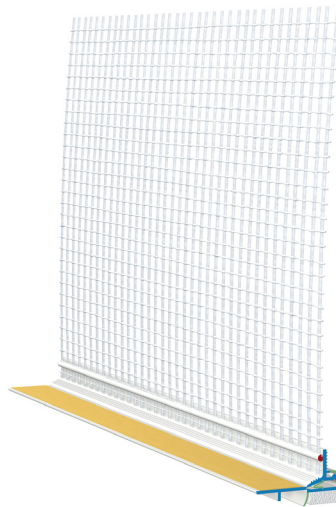

## Applications

- For ETIC systems with deep reveal insulation with insulation thicknesses up to 160 mm and with windows installed flush with the masonry

## Properties

- Plastic profile produced according to DIN 16941
- UV and weather resistant

## Substrate

### Condition / Testing

- The substrate must be dry, level, free of adhesion-reducing residues, dust and grease free as well as fit for the bonding.
- Carry out an adhesion test before assembly. At a concealed place, clean substrate with a dry, clean cloth and glue on an approx. 10-cm long profile piece and press on firmly. After 30 minutes, pull off the substrate with force. The break must run continuously in the foam adhesive tape.

### Pretreatment

- The area being glued is to be cleaned and pre-treated if necessary with the AKURIT T-FAL PS primer pen.

## Processing

### Applying / Processing / Assembling

- Cut mesh profile to the finished size with anvil shears.
- Cut the protective flap at the top/bottom along the predetermined breaking point by approx. 5 cm.
- Stick the mesh profile onto the roller shutter box/edge profiles etc. and press on.
- When removing the snap-off protective flap, no cutter knife must be used.
- Fit insulation and plaster according to ETICS approval.

### Notes

- When removing the snap-off protective flap, no cutter knife must be used.

## Storage

- Store dry, flat and frost-free.
- Deformation of the product due to improper storage must be avoided.

## Packaging

- 25 pieces/bundle

## Technical Data

**Length** 2.4 m

All data are average values that were determined under laboratory conditions according to relevant test standards and application tests. Deviations are possible under practical conditions.

# akurit MILANO W32

Mesh profile

## General notes

This information sheet provides only general recommendations. Should you have any queries relating to a specific application, please contact our technical sales advisor or call our hotline: +49 541 601-601. All of the details given are based on our current knowledge and experience and on the assumption that the materials are professionally applied and used for their normal purpose. All of the details are non-binding and do not release users from their duty to undertake their own tests to ensure suitability for the intended application. Due to the effects of different weather, processing and construction site conditions, no guarantee can be given for the general validity of all details. We reserve the right to make changes as a result of further development of the product and applications engineering. The general rules for construction engineering, the valid standards and guidelines, and the technical working guidelines must be observed. The publication of this technical data sheet renders all previous editions of this data sheet void. Please obtain the latest information from our website.