


akurit FIN-TEX W45

Metal push-on profile

Connection profile for fitting onto sheet metal connections (e.g. roof edge trim)

- With plaster edge for targeted water flow

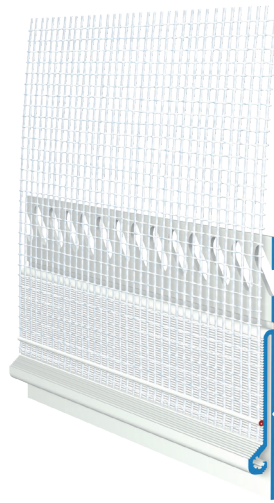

Applications

- For absorbing compensating movements between plaster and sheet metal
- for 8 mm plaster thickness

Properties

- Plastic profile produced according to DIN 16941
- UV and weather resistant

Substrate

Condition / Testing

- The substrate must be dry and free of dust and grease.

Processing

Applying / Processing / Assembling

- Fit and adjust the sheet metal connection profile.
- Attach the connector and plug in the next profile.
- Cut the profile to the finished size with support shears.
- The fabric can be fixed in the insulation with the connectors.

Storage

- Store dry and flat.

Packaging

- 25 pieces/bundle

Technical Data

Length	2.0 m
---------------	-------

All data are average values that were determined under laboratory conditions according to relevant test standards and application tests. Deviations are possible under practical conditions.

General notes

This information sheet provides only general recommendations. Should you have any queries relating to a specific application, please contact our technical sales advisor or call our hotline: +49 541 601-601. All of the details given are based on our current knowledge and experience and on the assumption that the materials are professionally applied and used for their normal purpose. All of the details are non-binding and do not release users from their duty to undertake their own tests to ensure suitability for the intended application. Due to the effects of different weather, processing and construction site conditions, no guarantee can be given for the general validity of all details. We reserve the right to make changes as a result of further development of the product and applications engineering. The general rules for construction engineering, the valid standards and guidelines, and the technical working guidelines must be observed. The publication of this technical data sheet renders all previous editions of this data sheet void. Please obtain the latest information from our website.