


akurit MINI A11

Plaster junction profile

PVC profile with self-adhesive protective flap for cover film

- driving rain-proof
- weather and UV-resistant
- width: 9 mm

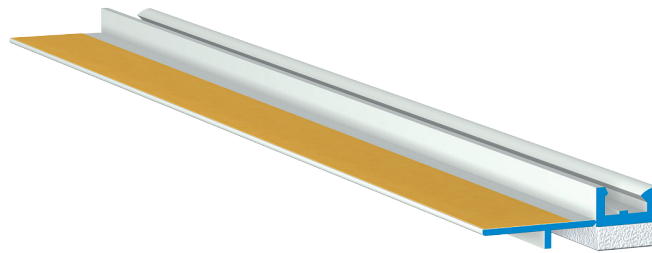

Applications

- for the connection between plaster and windows, doors or similar components
- for base plasters, scratch-finish plasters and renovation plasters

Properties

- thermally and acoustically decoupling

Substrate

Suitable substrates

- Windows, doors and similar building elements made of wood, metal or plastic

Condition / Testing

- The substrate must be dry, level, free of adhesion-reducing residues, dust and grease free as well as fit for the bonding.
- Windows and doors must be installed according to the applicable directives and the latest technology.
- Carry out an adhesion test before assembly. At a concealed place, clean substrate with a dry, clean cloth and glue on an approx. 10-cm long profile piece and press on firmly. After 30 minutes, pull off the substrate with force. The break must run continuously in the foam adhesive tape.

Pretreatment

- Clean window/door frames immediately before gluing on the profile.

Processing

Temperature

- Do not use in case of building element temperatures of less than +5°C or over +40°C.

Applying / Processing / Assembling

- Cut profile to length with anvil shears. The top cross profile is later glued between the vertical profiles on the sides. To do so, notch the protective flap on the vertical profiles sufficiently with the shears. Score protective flap approx. 5 cm on the intended breaking edge to make it easier to subsequently remove the protective flap.
- Pull protective paper off the PE sealing tape and stick on parallel to the edge.
- Stick on the vertical profiles first, then the top cross profile.
- Pull protective paper off the protective flap and press the on-site protective film onto the adhesive tape on the protective flap.

Notes

- After completing all the work, carefully pull the on-site film forwards. Fold protective flap forwards once along the entire length and pull forwards off the profile.

Storage

- Store dry, flat and frost-free.
- Deformation of the product due to improper storage must be avoided.
- If stored in its original packaging, the product will keep for at least 12 months from the date of manufacture.

akurit MINI A11

Plaster junction profile

Packaging

- 10 pcs/carton

General notes

This information sheet provides only general recommendations. Should you have any queries relating to a specific application, please contact our technical sales advisor or call our hotline: +49 541 601-601. All of the details given are based on our current knowledge and experience and on the assumption that the materials are professionally applied and used for their normal purpose. All of the details are non-binding and do not release users from their duty to undertake their own tests to ensure suitability for the intended application. Due to the effects of different weather, processing and construction site conditions, no guarantee can be given for the general validity of all details. We reserve the right to make changes as a result of further development of the product and applications engineering. The general rules for construction engineering, the valid standards and guidelines, and the technical working guidelines must be observed. The publication of this technical data sheet renders all previous editions of this data sheet void. Please obtain the latest information from our website.